

# VA9208-xxx-x Series Electric Spring Return Valve Actuators

## Product Bulletin

VA9208-GGx-x, VA9208-AGx-x, VA9208-Bxx-x

Code No. LIT-12011622

Issued November 2017

Refer to the [QuickLIT Web site](#) for the most up-to-date version of this document.

The VA9208-xxx-x Series Electric Spring Return Valve Actuators are direct-mount valve actuators. These bidirectional actuators are used to provide accurate positioning on Johnson Controls® VG1000 Series 1-1/4, 1-1/2, and 2 in. (DN32, DN40, and DN50) ball valves in Heating, Ventilating, and Air Conditioning (HVAC) applications. A mechanical spring return system provides rated torque with and without power applied to the actuator. The series includes the following control responses:

- On/Off, 24 V, 120 VAC, 230 VAC power
- On/Off and Floating Point, 24 V power
- Proportional, 24 V power, for 0(2) to 10 VDC or 0(4) to 20 mA Control Signal

Optional line voltage auxiliary switches indicate an endoscope position or perform switching functions within the selected rotation range.



**Figure 1: VA9208 Spring Return Electric Valve Actuator**

**Table 1: Features and Benefits (Part 1 of 2)**

| Features                                                                    | Benefits                                                                                                                                                                                              |
|-----------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Direct Mounting with a Single Screw</b>                                  | Reduces installation time and cost.                                                                                                                                                                   |
| <b>Electronic Stall Detection</b>                                           | Protects from overload at all angles of rotation. Power consumption is reduced holding mode. The actuator may be stalled anywhere in its rotation range without the need for mechanical end switches. |
| <b>Double-Insulated Construction</b>                                        | Eliminates need for electrical ground connection for regulatory agency compliance.                                                                                                                    |
| <b>Microprocessor-Controlled Brushless DC Motor (-AGx and -GGx Models)</b>  | Provides constant runtime independent of torque and ensures long life.                                                                                                                                |
| <b>External Mode Selection Switch (-AGx and -GGx Models)</b>                | Permits control logic reversal for Floating Control (-AGx Models). Permits calibration input signal range selection, and control logic reversal for Proportional Control (-GGx Models).               |
| <b>Integral Cables with Colored and Numbered Conductors</b>                 | Simplify installation and field wiring.                                                                                                                                                               |
| <b>Integral Connectors for 3/8 in. (10 mm) Flexible Metal Conduit (FMC)</b> | Simplify installation and field wiring.                                                                                                                                                               |
| <b>Optional Integrated Auxiliary Switches</b>                               | Provide two integrated line-voltage-capable Single-Pole, Double-Throw (SPDT) switches (one fixed and one adjustable switch point) that factuality safety interfacing or signaling.                    |
| <b>Plenum Rated Models</b>                                                  | Enable use in other environmental air spaces (plenums) in accordance with section 300.22(C) of the National Electric Code.                                                                            |
| <b>Optional Thermal Barrier</b>                                             | Provides for 284°F (140°C) hot water or 15 psi saturated steam applications.                                                                                                                          |
| <b>Available Weather Shield for Field Mounting</b>                          | Provides NEMA 3R protection for the actuator.                                                                                                                                                         |

**Table 1: Features and Benefits (Part 2 of 2)**

| Features                                                                                            | Benefits                                                                                                                                |
|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| <b>Locking Manual Override with Auto Release and Crank Storage</b>                                  | Allows manual positioning of the actuator hub with automatic return to normal operation when power and the control signal are restored. |
| <b>Override Control (Proportional Model Only)</b>                                                   | Supports control systems override application through field wiring.                                                                     |
| <b>Underwriters Laboratories Inc.® (UL), CE Mark, and C-Tick Compliance</b>                         | Provides internationally recognized regulatory agency approvals.                                                                        |
| <b>Manufactured under International Standards Organization (ISO) 9001 Quality Control Standards</b> | Ensures quality.                                                                                                                        |
| <b>5-Year Warranty</b>                                                                              | Protects consumer investment.                                                                                                           |

**IMPORTANT:** Use these VA9208-xxx-x Series Electric Spring Return Actuators only to control equipment under normal operating conditions. Where failure or malfunction of the electric actuator could lead to personal injury or property damage to the controlled equipment or other property, additional precautions must be designed into the control system. Incorporate and maintain other devices, such as supervisory or alarm systems or safety or limit controls, intended to warn of or protect against failure or malfunction of the electric actuator.

**IMPORTANT:** Before specifying VA9208-xxx-x Series Electric Spring Return Actuators for plenum applications, verify acceptance of exposed plastic materials in plenum areas with the local building authority. Building codes for plenum requirements vary by location. Some local building authorities accept compliance to UL 1995, Heating and Cooling Equipment, whereas others use different acceptance criteria.

### **VA9208-GGx-x Series Proportional Actuators**

The VA9208-GGx-x Series Actuators provide proportional modulation of VG1000 1-1/4, 1-1/2, and 2 inch ball valves in HVAC systems that are controlled by an electronic controller or positioner. The actuator responds to 0 to 10 VDC or 2 to 10 VDC control signals. With the addition of a 500 ohm resistor, the actuator responds to a 0 to 20 mA or 4 to 20 mA signal. A 0 to 10 VDC or 2 to 10 VDC feedback signal indicates position and provides support for master-slave applications.

The VA9208-GGA-2 actuators include plenum-rated cables and are specially configured for installation in spaces used for environmental air-handling purposes, other than ducts and plenums, as specified in National Fire Protection Association (NFPA) 70: National Electrical Code section 300.22(C), Other Space Used for Environmental Air. The space over a hung ceiling, when used for environmental air handling purposes, is an example of the type of space for which these actuators are configured.

### **VA9208-AGx-x Series On/Off and Floating Point Actuators**

The VA9208-AGx-x Series Actuators provide on/off control or modulation of VG1000 1-1/4, 1-1/2, and 2 inch ball valves in HVAC systems. Floating point control can be provided from a triac or relay. On/off control can be provided from a manual switch, controller, auxiliary switch from a fan motor contactor, or similar device.

The VA9208-AGA-2 actuators include plenum-rated cables and are specially configured for installation in spaces used for environmental air-handling purposes other than ducts and plenums as specified in National Fire Protection Association (NFPA) 70: National Electrical Code section 300.22(C), Other Space Used for Environmental Air. The space over a hung ceiling, when used for environmental air handling purposes, is an example of the type of space for which these actuators are configured.

### **VA9208-Bxx-3 Series On/Off Actuators**

The VA9208-Bxx-3 Series Actuators provide on/off control of VG1000 1-1/4, 1-1/2, and 2 inch ball valves in HVAC systems. On/off control can be provided from a manual switch, controller, auxiliary switch from a fan motor contactor, or similar device.

## Operation

VA9208-xxx-x Series Actuators provide 95° of rotation. A graduated scale from 0% to 100% and a position indicator provide visual indication of stroke. A manual override allows manual positioning and temporary locking of the actuator output hub. Restoring power and control signal to the actuator automatically releases the manual override the first time the actuator is commanded to advance past the locked position. When power fails during service, the mechanical spring return system returns the valve to the home position.

### **VA9208-GGx-x Series Proportional Actuators**

The VA9208-GGx-x Series uses a brushless DC motor controlled by a microprocessor. The microprocessor drives the motor at constant speed, independent of torque. The microprocessor also monitors the brushless DC motor's rotation to prevent damage to the actuator in a stall condition. The actuator can be stalled anywhere within its rotation range without the need for mechanical end switches. Power consumption is reduced in the holding mode.

The VA9208-GGC-3 version is provided with two integrated, line-voltage-capable auxiliary SPDT switches. The Switch S1 switch point is fixed at 83% closing, while the Switch S2 switch point is independently and continuously adjustable from 74% to 5%. Auxiliary switches are double-insulated so an electrical ground is not required.

### **VA9208-AGx-x Series On/Off and Floating Point Actuators**

The VA9208-AGx-x Series uses a brushless DC motor controlled by a microprocessor. The microprocessor drives the motor at constant speed, independent of torque. The microprocessor also monitors the brushless DC motor's rotation to prevent damage to the actuator in a stall condition. The actuator can be stalled anywhere within its rotation range without the need for mechanical end switches. Power consumption is reduced in the holding mode.

The VA9208-AGC-3 version is provided with two integrated, line-voltage-capable auxiliary SPDT switches. The Switch S1 switch point is fixed at 83% closing, while the Switch S2 switch point is independently and continuously adjustable from 74% to 5%. Auxiliary switches are double-insulated so an electrical ground is not required.

### **VA9208-Bxx-3 Series On/Off Actuators**

The VA9208-Bxx-3 Series uses a DC brush motor controlled by analog electronics. The actuator can be stalled anywhere within its rotation range without the need for mechanical end switches. Power consumption is reduced in the holding mode. Three different voltage ratings are available for On/Off Actuators.

- VA9208-BGx-3: AC 24 V 50/60 Hz or DC 24 V power
- VA9208-BAx-3: AC 120 V 50/60 Hz power
- VA9208-BDx-3: AC 230 V 50/60 Hz power

The VA9208-BAx-3 and VA9208-BDx-3 actuators are double-insulated so an electrical ground is not required.

The VA9208-BxC-3 versions are provided with two integrated, line-voltage-capable auxiliary SPDT switches. The Switch S1 switch point is fixed at 83% closing, while the Switch S2 switch point is independently and continuously adjustable from 74% to 5%. Auxiliary switches are double-insulated so an electrical ground is not required.

Wiring Diagrams

VA9208-GGx-x Series Proportional Actuators

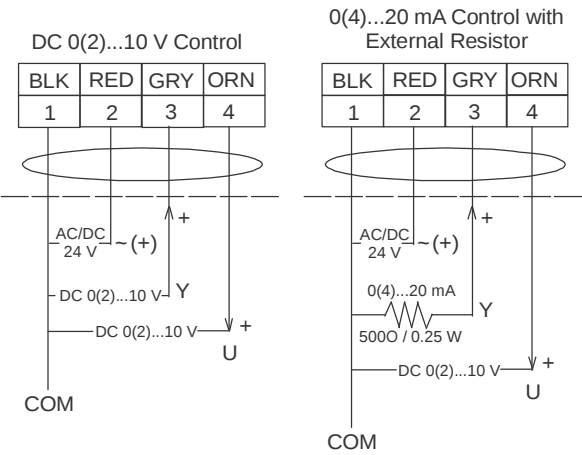


Figure 2: VA9208-GGx-x Control Wiring Diagrams

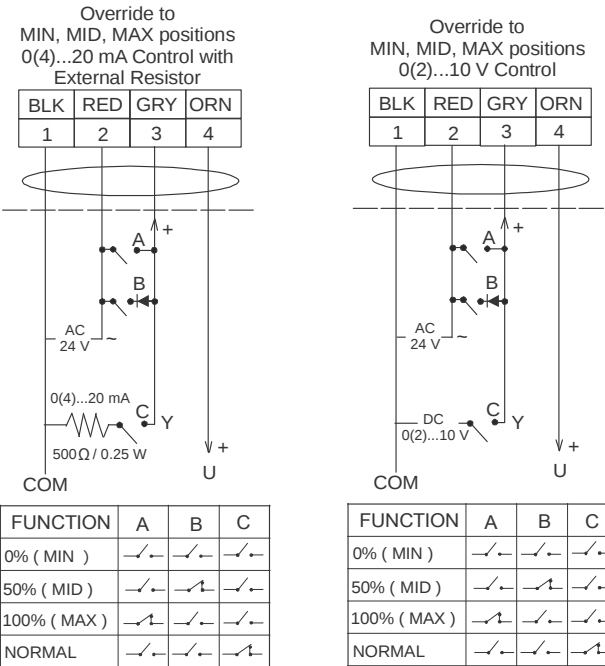
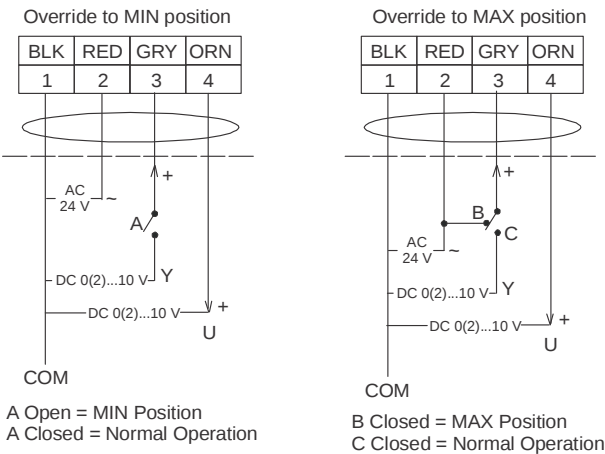


Figure 3: VA9208-GGx Control Wiring Diagram (Overrides)

## VA9208-Bxx-3 Series On/Off Actuators

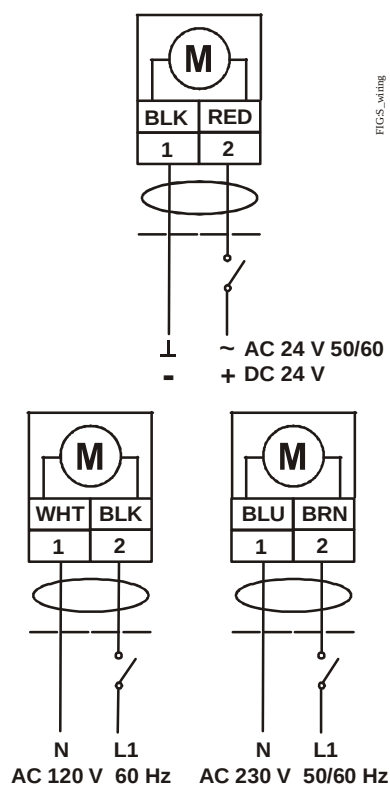


Figure 4: VA9208-Bxx-3 Control Wiring Diagrams

## VA9208-xxx-x Auxiliary Switches

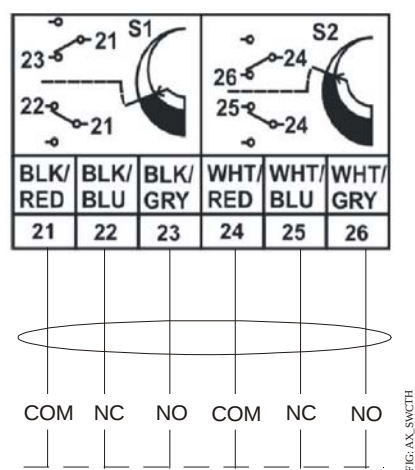


Figure 5: VA9208-xxx-x Auxiliary Switch Wiring Diagram

## VA9208-AGx-x Series On/Off and Floating Point Actuators

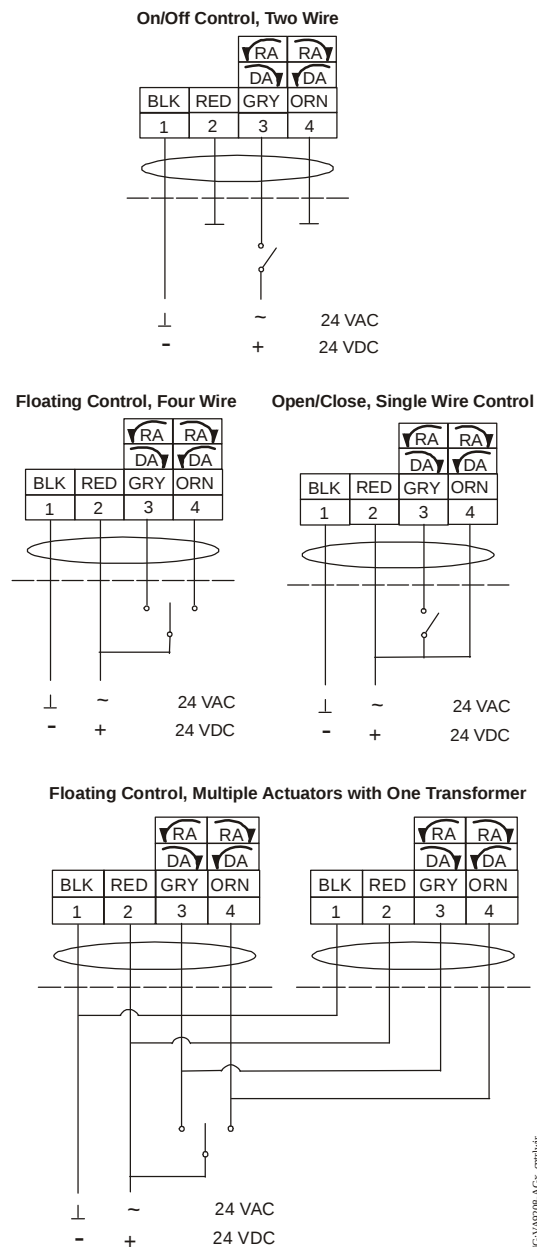


Figure 6: VA9208-AGx-x Control Wiring Diagrams

## Repair Information

A number of replacement parts are available; see Table 3 for more details. If a VA9208-xxx-x Series Electric Spring Return Actuator fails to operate within its specifications, replace the unit. For a replacement electric actuator, contact the nearest Johnson Controls® representative.

## Ordering Information

Table 2 shows the VA9208-xxx-x Series Electric Spring Return Valve Actuator models.

**Table 2: VA9208-xxx-x Series Electric Spring Return Valve Actuator Models**

| Code Number  | Rotation Time (sec) | For 90°                   | Power Requirement            |                              |                 |                 | Power Consumption             |                       |                             | Input Signal |                |                                                         | Position Feedback | Auxiliary Switches                       | Electrical Connection                 |                                      |                                 |
|--------------|---------------------|---------------------------|------------------------------|------------------------------|-----------------|-----------------|-------------------------------|-----------------------|-----------------------------|--------------|----------------|---------------------------------------------------------|-------------------|------------------------------------------|---------------------------------------|--------------------------------------|---------------------------------|
|              | Power On (Running)  | Power Off (Spring Return) | 24 VAC +/- 25% VDC +20%/-10% | 24 VAC +/- 20% VDC +20%/-10% | 120 VAC +/- 10% | 230 VAC +/- 10% | VA Rating, Transformer Sizing | VA: Running (Holding) | Amperage: Running (Holding) | On/Off       | Floating Point | 0(2) to 10 VDC<br>0(4) to 20 mA (with 500 ohm resistor) | 0(2) to 10 VDC    | 2 SPDT, 5.0 A (2.9 A Inductive) at 240 V | 48 in. (1.2 m) 18 AWG Appliance Cable | 120 in. (3.05 m) 19 AWG Plenum Cable | Integral 3/8 in. FMC Connectors |
| VA9208-AGA-2 | 150                 | 17 to 25 <sup>1</sup>     |                              | X                            |                 |                 | 8                             | 7.9 (5.5)             |                             | X            | X              |                                                         |                   |                                          |                                       | X                                    | X                               |
| VA9208-AGA-3 | 150                 | 17 to 25 <sup>1</sup>     |                              | X                            |                 |                 | 8                             | 7.9 (5.5)             |                             | X            | X              |                                                         |                   |                                          | X                                     |                                      | X                               |
| VA9208-AGC-3 | 150                 | 17 to 25 <sup>1</sup>     |                              | X                            |                 |                 | 8                             | 7.9 (5.5)             |                             | X            | X              |                                                         |                   | X                                        | X                                     |                                      | X                               |
| VA9208-BGA-3 | 55 to 71            | 13 to 26 <sup>2</sup>     | X                            |                              |                 |                 | 7                             | 6.1 (1.2)             |                             | X            |                |                                                         |                   |                                          | X                                     |                                      | X                               |
| VA9208-BGC-3 | 55 to 71            | 13 to 26 <sup>2</sup>     | X                            |                              |                 |                 | 7                             | 6.1 (1.2)             |                             | X            |                |                                                         |                   | X                                        | X                                     |                                      | X                               |
| VA9208-BAA-3 | 55 to 71            | 13 to 26 <sup>2</sup>     |                              |                              | X               |                 |                               |                       | 0.05 (0.03)                 | X            |                |                                                         |                   |                                          | X                                     |                                      | X                               |
| VA9208-BAC-3 | 55 to 71            | 13 to 26 <sup>2</sup>     |                              |                              | X               |                 |                               |                       | 0.05 (0.03)                 | X            |                |                                                         |                   | X                                        | X                                     |                                      | X                               |
| VA9208-BDA-3 | 55 to 71            | 13 to 26 <sup>2</sup>     |                              |                              |                 | X               |                               |                       | 0.04 (0.03)                 | X            |                |                                                         |                   |                                          | X                                     |                                      | X                               |
| VA9208-BDC-3 | 55 to 71            | 13 to 26 <sup>2</sup>     |                              |                              |                 | X               |                               |                       | 0.04 (0.03)                 | X            |                |                                                         |                   | X                                        | X                                     |                                      | X                               |
| VA9208-GGA-2 | 150                 | 17 to 25 <sup>1</sup>     |                              | X                            |                 |                 | 8                             | 7.9 (5.5)             |                             |              |                | X                                                       | X                 |                                          |                                       | X                                    | X                               |
| VA9208-GGA-3 | 150                 | 17 to 25 <sup>1</sup>     |                              | X                            |                 |                 | 8                             | 7.9 (5.5)             |                             |              |                | X                                                       | X                 |                                          | X                                     |                                      | X                               |
| VA9208-GGC-3 | 150                 | 17 to 25 <sup>1</sup>     |                              | X                            |                 |                 | 8                             | 7.9 (5.5)             |                             |              |                | X                                                       | X                 | X                                        | X                                     |                                      | X                               |

- 22 seconds nominal at room temperature and rated load, 94 seconds maximum at rated load and -40°F (-40°C).
- 21 seconds nominal at room temperature and rated load, 39 seconds maximum at rated load and -4°F (-20°C), 108 seconds maximum at 53 lb·in (6 N·m) and -40°F (-40°C).


## Accessories

**Table 3: Accessories/Repair Parts (Order Separately)**

| Code Number      | Description                                                                                                                                                  |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>M9000-560</b> | Ball Valve Linkage Kit for applying M9203 and M9208 Series Actuators to VG1000 Series Valves (Quantity 1)                                                    |
| <b>M9000-561</b> | Thermal Barrier Extends M(VA)9104, M(VA)9203, M(VA)9208, and M(VA)9308/9310 Series Electric Actuator Applications to Include Low Pressure Steam (Quantity 1) |
| <b>M9000-342</b> | Weathershield Kit for VG1000 Series Ball Valve application of VA9104, VA9203, VA9208, VA9308, and VA9310 Series Electric Actuators (Quantity 1)              |
| <b>M9220-604</b> | Replacement Manual Override Cranks with Long Crank Radius: 2.83 in. (72 mm) (Quantity 5)                                                                     |
| <b>M9208-605</b> | Replacement Manual Override Cranks with Short Crank Radius: 1.83 in. (46.5 mm) (Quantity 5)                                                                  |
| <b>M9000-700</b> | Universal Ball Valve Linkage (Quantity 1)                                                                                                                    |

## Dimensions

See Figure 7 and Table 4 for valve actuator dimensions.

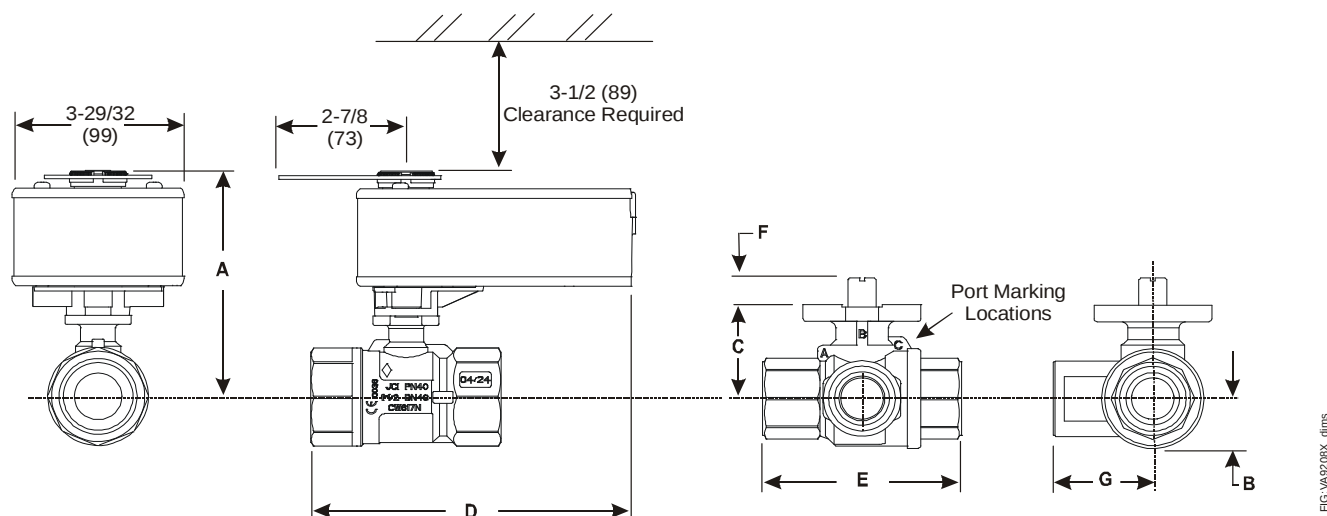


**Figure 7: Spring Return VA9208 Actuated VG1241, VG1245, VG1841, and VG1845 Series Ball Valve Dimensions, in. (mm)**

**Table 4: VA9208 Actuated VG1241, VG1245, VG1841, and VG1845 Series Ball Valve Dimensions, in. (mm)**

| Valve Size in. (DN) | Valve Style <sup>1</sup> | A             | B            | C            | D             | E             | F         | G            |
|---------------------|--------------------------|---------------|--------------|--------------|---------------|---------------|-----------|--------------|
| <b>1-1/4 (DN32)</b> | All                      | 5-5/32 (131)  | 1-1/32 (26)  | 1-23/32 (44) | 7-5/32 (182)  | 3-15/16 (100) | 11/32 (9) | 1-31/32 (50) |
| <b>1-1/2 (DN40)</b> | All                      | 5-5/16 (135)  | 1-9/64 (29)  | 1-57/64 (48) | 7-3/8 (187)   | 4-21/64 (110) | 11/32 (9) | 2-11/64 (55) |
| <b>2 (DN50)</b>     | 2-way                    | 5-17/32 (140) | 1-15/32 (37) | 2-1/8 (54)   | 7-19/32 (193) | 4-27/32 (123) | 11/32 (9) | 2-27/64 (62) |
|                     | 3-way                    |               |              |              | 7-7/8 (200)   |               |           |              |

1. Port A must always be connected to the coil (Figure 7).

See Figure 8 and Table 5 for valve actuator dimensions with optional M9000-561 Thermal Barrier installed.

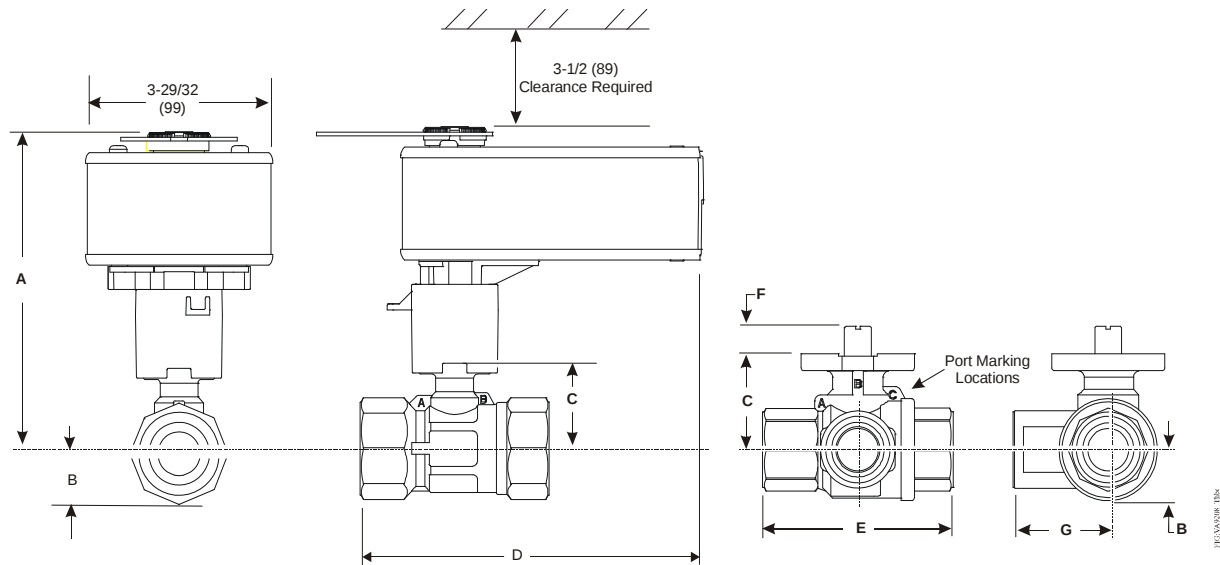

**Figure 8: Spring Return VA9208 Actuated VG1241, VG1245, VG1841, and VG1845 Series Ball Valve with Optional M9000-561 Thermal Barrier Installed Dimensions, in. (mm)**

**Table 5: VA9208 Actuated VG1241, VG1245, VG1841, and VG1845 Series Ball Valve with Optional M9000-561 Thermal Barrier Installed Dimensions, in. (mm)**

| Valve Size in. (DN) | Valve Style <sup>1</sup> | A             | B            | C            | D             | E             | F         | G            |
|---------------------|--------------------------|---------------|--------------|--------------|---------------|---------------|-----------|--------------|
| 1-1/4 (DN32)        | All                      | 9-17/64 (235) | 1-1/32 (26)  | 1-23/32 (44) | 7-1/4 (184)   | 3-15/16 (100) | 11/32 (9) | 1-31/32 (50) |
| 1-1/2 (DN40)        | All                      | 9-15/16 (240) | 1-9/64 (29)  | 1-57/64 (48) | 7-7/16 (189)  | 4-21/64 (110) | 11/32 (9) | 2-11/64 (55) |
| 2 (DN50)            | 2-way                    | 9-31/32 (244) | 1-15/32 (37) | 2-1/8 (54)   | 7-11/16 (195) | 4-27/32 (123) | 11/32 (9) | N/A          |
|                     | 3-way                    |               |              | 7-7/8 (200)  |               |               |           | 2-27/64 (62) |

1. Port A must always be connected to the coil (Figure 8).

## Technical Specifications

### VA9208-GGx-x Series Proportional Electric Spring Return Actuator (Part 1 of 2 )

|                                               |                                         |                                                                                                                                                                                                                                                                                                                            |
|-----------------------------------------------|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Power Requirements</b>                     | <b>-GGx Models</b>                      | AC 24 V (AC 19.2 V to 28.8 V) at 50/60 Hz: Class 2 (North America) or Safety Extra-Low Voltage (SELV) (Europe), 7.9 VA Running, 5.5 VA Holding Position<br>DC 24 V (DC 21.6 V to 28.8 V): Class 2 (North America) or SELV (Europe)<br>3.5 W Running, 1.9 W Holding Position<br>Minimum Transformer Size: 8 VA per Actuator |
| <b>Input Signal/ Adjustments</b>              | <b>-GGx Models</b>                      | Factory Set at DC 0 to 10 V, CW Rotation with Signal Increase Selectable DC 0 (2) to 10 V or 0 (4) to 20 mA with Field -Furnished 500 ohm 0.25 W Minimum Resistor; Switch Selectable Direct or Reverse Action with Signal Increase                                                                                         |
| <b>Control Input Impedance</b>                | <b>-GGx Models</b>                      | Voltage Input: 100,000 ohm<br>Current Input: 500 ohm with Field Furnished 500 ohm Resistor                                                                                                                                                                                                                                 |
| <b>Feedback Signal</b>                        | <b>-GGx Models</b>                      | DC 0 (2) to 10 V for Desired Rotation Range up to 95°<br>Corresponds to Rotation Limits, 0.5 mA at 10 V Maximum                                                                                                                                                                                                            |
| <b>Auxiliary Switch Rating</b>                | <b>-xxC Models</b>                      | Two Single-Pole, Double-Throw (SPDT), Double-Insulated Switches with Gold over Silver Contacts:<br>AC 24 V, 50 VA Pilot Duty<br>AC 120 V, 5.8 A Resistive, 1/4 hp, 275 VA Pilot Duty<br>AC 240 V, 5.0 A Resistive, 1/4 hp, 275 VA Pilot Duty                                                                               |
| <b>Spring Return</b>                          |                                         | Direction is Selectable with Mounting Position of Actuator:<br>Actuator Face Labeled A is Away from Valve: CCW Spring Return<br>Actuator Face Labeled B is Away from Valve: CW Spring Return                                                                                                                               |
| <b>Rated Torque</b>                           | <b>Power On (Running)</b>               | 70 lb·in. (8 N·m) All Operating Temperatures                                                                                                                                                                                                                                                                               |
|                                               | <b>Power Off (Spring Returning)</b>     | 70 lb·in. (8 N·m) All Operating Temperatures                                                                                                                                                                                                                                                                               |
| <b>Rotation Range</b>                         |                                         | Maximum Full Stroke: 95°<br>Adjustable Stop: 35° to 95° Maximum Position                                                                                                                                                                                                                                                   |
| <b>Rotation Time for 90 Degrees of Travel</b> | <b>Power On (Running)</b>               | 150 Seconds Constant for 0 to 70 lb·in. (8 N·m) Load, at all Operating Conditions<br>90 Seconds for 0 to 70 lb·in. (8 N·m) in Calibration Mode or Override Mode                                                                                                                                                            |
|                                               | <b>Power Off (Spring Returning)</b>     | 17 to 25 Seconds for 0 to 70 lb·in. (8 N·m) Load, at Room Temperature<br>22 Seconds Nominal at Full Rated Load<br>94 Seconds Maximum with 70 lb·in. (8 N·m) Load, at -40°F (-40°C)                                                                                                                                         |
| <b>Life Cycles</b>                            |                                         | 60,000 Full Stroke Cycles with 70 lb·in. (8 N·m) Load<br>1,500,000 Repositions with 70 lb·in. (8 N·m) Load                                                                                                                                                                                                                 |
| <b>Audible Noise Rating</b>                   | <b>Power On (Running)</b>               | <35 dBA at 70 lb·in. (8 N·m) Load, at a Distance of 39-13/32 in. (1 m)                                                                                                                                                                                                                                                     |
|                                               | <b>Power On (Holding)</b>               | <20 dBA at a Distance of 39-13/32 in. (1 m)                                                                                                                                                                                                                                                                                |
|                                               | <b>Power Off (Spring Returning)</b>     | <52 dBA at 70 lb·in. (8 N·m) Load, at a Distance of 39-13/32 in. (1 m)                                                                                                                                                                                                                                                     |
| <b>Electrical Connections</b>                 | <b>GGx-3 Models</b>                     | 48 in. (1.2 m) UL 758 Type AWM Halogen Free Cable with 18 AWG (0.85 mm <sup>2</sup> ) Conductors and 1/4 in. (6 mm) Ferrule Ends                                                                                                                                                                                           |
|                                               | <b>GGx-2 Models</b>                     | 120 in. (3.05 m) UL 444 Type CMP Plenum Rated Cable with 19 AWG (0.75 mm <sup>2</sup> ) Conductors and 1/4 in. (6 mm) Ferrule Ends                                                                                                                                                                                         |
|                                               | <b>Auxiliary Switches (-xxC Models)</b> | 48 in. (1.2 m) UL 758 Type AWM Halogen Free Cable with 18 AWG (0.85 mm <sup>2</sup> ) Conductors and 1/4 in. (6 mm) Ferrule Ends                                                                                                                                                                                           |
| <b>Conduit Connections</b>                    |                                         | Integral Connectors for 3/8 in. (10 mm) Flexible Metal Conduit                                                                                                                                                                                                                                                             |

## VA9208-GGx-x Series Proportional Electric Spring Return Actuator (Part 2 of 2 )

|                                                                                                |                                                                          |                                                                                                                                                                                                                           |
|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Fluid Temperature Limits</b>                                                                | <b>VG12x1 and VG18x1 Series</b>                                          | 23 to 203°F (-5 to 95°C), Not Rated for Steam Service                                                                                                                                                                     |
|                                                                                                | <b>VG12x5 and VG18x5 Series</b>                                          | -22 to 212°F (-30 to 100°C), Not Rated for Steam Service                                                                                                                                                                  |
|                                                                                                | <b>VG12x5 and VG18x5 Series with M9000-561 Thermal Barrier Installed</b> | -22 to 284°F (-30 to 140°C) water; 15 psig (103 kPa) at 250°F (121°C) Saturated Steam                                                                                                                                     |
| <b>Ambient Conditions</b>                                                                      | <b>Standard Operating</b>                                                | -40 to 140°F (-40 to 60°C); 90% RH Maximum, Noncondensing                                                                                                                                                                 |
|                                                                                                | <b>Storage</b>                                                           | -40 to 185°F (-40 to 85°C); 95% RH Maximum, Noncondensing                                                                                                                                                                 |
| <b>Enclosure Rating</b>                                                                        |                                                                          | NEMA 2 (IP54) for all Mounting Directions                                                                                                                                                                                 |
| <div>  </div> | <b>United States</b>                                                     | UL Listed, CCN XAPX, File E27734; to UL 60730-1A: 2003-08, Ed. 3.1, Automatic Electrical Controls for Household and Similar Use; and UL 60730-2-14: 2002-02, Ed. 1, Part 2 Particular Requirements for Electric Actuators |
|                                                                                                | <b>Canada</b>                                                            | UL Listed, CCN XAPX7, File E27734; to UL 60730-1:02-CAN/CSA: July 2002, 3rd Ed., Automatic Electrical Controls for Household and Similar Use; and CSA C22.2 No. 24-93 Temperature Indicating and Regulating Equipment     |
|                                                                                                | <b>Europe</b>                                                            | CE Mark – Johnson Controls, Inc., declares that this product is in compliance with the essential requirements and other relevant provisions of the EMC Directive and the Low Voltage Directive.                           |
|                                                                                                | <b>Australia and New Zealand</b>                                         | RCM Mark, Australia/NZ Emissions Compliant                                                                                                                                                                                |
| <b>Shipping Weight</b>                                                                         | <b>-GGA Models</b>                                                       | 3.5 lb (1.6 kg)                                                                                                                                                                                                           |
|                                                                                                | <b>-GGC Models</b>                                                       | 3.9 lb (1.8 kg)                                                                                                                                                                                                           |

## VA9208-AGx-x Series On/Off and Floating Point Electric Spring Return Actuators (Part 1 of 2 )

|                                               |                                         |                                                                                                                                                                                                                                                                                                                            |
|-----------------------------------------------|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Power Requirements</b>                     | <b>-AGx Models</b>                      | AC 24 V (AC 19.2 V to 28.8 V) at 50/60 Hz: Class 2 (North America) or Safety Extra-Low Voltage (SELV) (Europe), 7.9 VA Running, 5.5 VA Holding Position<br>DC 24 V (DC 21.6 V to 28.8 V): Class 2 (North America) or SELV (Europe)<br>3.5 W Running, 1.9 W Holding Position<br>Minimum Transformer Size: 8 VA per Actuator |
| <b>Input Signal/ Adjustments</b>              | <b>-AGx Models</b>                      | AC 19.2 to 28.8 V at 50/60 Hz or DC 24 V +20%/-10% Class 2 (North America) or SELV (Europe) Minimum Pulse Width: 500 ms                                                                                                                                                                                                    |
| <b>Control Input Impedance</b>                | <b>-AGx Models</b>                      | 3,000 ohm Control Inputs                                                                                                                                                                                                                                                                                                   |
| <b>Auxiliary Switch Rating</b>                | <b>-xxC Models</b>                      | Two Single-Pole, Double-Throw (SPDT), Double-Insulated Switches with Gold over Silver Contacts:<br>AC 24 V, 50 VA Pilot Duty<br>AC 120 V, 5.8 A Resistive, 1/4 hp, 275 VA Pilot Duty<br>AC 240 V, 5.0 A Resistive, 1/4 hp, 275 VA Pilot Duty                                                                               |
| <b>Spring Return</b>                          |                                         | Direction is Selectable with Mounting Position of Actuator:<br>Actuator Face Labeled A is Away from Valve: CCW Spring Return<br>Actuator Face Labeled B is Away from Valve: CW Spring Return                                                                                                                               |
| <b>Rated Torque</b>                           | <b>Power On (Running)</b>               | 70 lb·in. (8 N·m) All Operating Temperatures                                                                                                                                                                                                                                                                               |
|                                               | <b>Power Off (Spring Returning)</b>     | 70 lb·in. (8 N·m) All Operating Temperatures                                                                                                                                                                                                                                                                               |
| <b>Rotation Range</b>                         |                                         | Maximum Full Stroke: 95°                                                                                                                                                                                                                                                                                                   |
| <b>Rotation Time for 90 Degrees of Travel</b> | <b>Power On (Running)</b>               | 150 Seconds for 0 to 70 lb·in. (8 N·m) Load, at all Operating Conditions                                                                                                                                                                                                                                                   |
|                                               | <b>Power Off (Spring Returning)</b>     | 17 to 25 Seconds for 0 to 70 lb·in. (8 N·m) Load, at Room Temperature<br>22 Seconds Nominal at Full Rated Load<br>94 Seconds Maximum with 70 lb·in. (8 N·m) Load, at -40°F (-40°C)                                                                                                                                         |
| <b>Life Cycles</b>                            |                                         | 60,000 Full Stroke Cycles with 70 lb·in. (8 N·m) Load<br>1,500,000 Repositions with 70 lb·in. (8 N·m) Load                                                                                                                                                                                                                 |
| <b>Audible Noise Rating</b>                   | <b>Power On (Running)</b>               | <35 dBA at 70 lb·in. (8 N·m) Load, at a Distance of 39-13/32 in. (1 m)                                                                                                                                                                                                                                                     |
|                                               | <b>Power On (Holding)</b>               | <20 dBA at a Distance of 39-13/32 in. (1 m)                                                                                                                                                                                                                                                                                |
|                                               | <b>Power Off (Spring Returning)</b>     | <52 dBA at 70 lb·in. (8 N·m) Load, at a Distance of 39-13/32 in. (1 m)                                                                                                                                                                                                                                                     |
| <b>Electrical Connections</b>                 | <b>AGx-3 Models</b>                     | 48 in. (1.2 m) UL 758 Type AWM Halogen Free Cable with 18 AWG (0.85 mm <sup>2</sup> ) Conductors and 1/4 in. (6 mm) Ferrule Ends                                                                                                                                                                                           |
|                                               | <b>AGx-2 Models</b>                     | 120 in. (3.05 m) UL 444 Type CMP Plenum Rated Cable with 19 AWG (0.75 mm <sup>2</sup> ) Conductors and 1/4 in. (6 mm) Ferrule Ends                                                                                                                                                                                         |
|                                               | <b>Auxiliary Switches (-xxC Models)</b> | 48 in. (1.2 m) UL 758 Type AWM Halogen Free Cable with 18 AWG (0.85 mm <sup>2</sup> ) Conductors and 1/4 in. (6 mm) Ferrule Ends                                                                                                                                                                                           |
| <b>Conduit Connections</b>                    |                                         | Integral Connectors for 3/8 in. (10 mm) Flexible Metal Conduit                                                                                                                                                                                                                                                             |

**VA9208-AGx-x Series On/Off and Floating Point Electric Spring Return Actuators (Part 2 of 2 )**

|                                                                                                |                                                                          |                                                                                                                                                                                                                           |
|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Fluid Temperature Limits</b>                                                                | <b>VG12x1 and VG18x1 Series</b>                                          | 23 to 203°F (-5 to 95°C), Not Rated for Steam Service                                                                                                                                                                     |
|                                                                                                | <b>VG12x5 and VG18x5 Series</b>                                          | -22 to 212°F (-30 to 100°C), Not Rated for Steam Service                                                                                                                                                                  |
|                                                                                                | <b>VG12x5 and VG18x5 Series with M9000-561 Thermal Barrier Installed</b> | -22 to 284°F (-30 to 140°C) water; 15 psig (103 kPa) at 250°F (121°C) Saturated Steam                                                                                                                                     |
| <b>Ambient Conditions</b>                                                                      | <b>Standard Operating</b>                                                | -40 to 140°F (-40 to 60°C); 90% RH Maximum, Noncondensing                                                                                                                                                                 |
|                                                                                                | <b>Storage</b>                                                           | -40 to 185°F (-40 to 85°C); 95% RH Maximum, Noncondensing                                                                                                                                                                 |
| <b>Enclosure Rating</b>                                                                        |                                                                          | NEMA 2 (IP54) for all Mounting Directions                                                                                                                                                                                 |
| <div>  </div> | <b>United States</b>                                                     | UL Listed, CCN XAPX, File E27734; to UL 60730-1A: 2003-08, Ed. 3.1, Automatic Electrical Controls for Household and Similar Use; and UL 60730-2-14: 2002-02, Ed. 1, Part 2 Particular Requirements for Electric Actuators |
|                                                                                                | <b>Canada</b>                                                            | UL Listed, CCN XAPX7, File E27734; to UL 60730-1:02-CAN/CSA: July 2002, 3rd Ed., Automatic Electrical Controls for Household and Similar Use; and CSA C22.2 No. 24-93 Temperature Indicating and Regulating Equipment     |
|                                                                                                | <b>Europe</b>                                                            | CE Mark – Johnson Controls, Inc., declares that this product is in compliance with the essential requirements and other relevant provisions of the EMC Directive and the Low Voltage Directive.                           |
|                                                                                                | <b>Australia and New Zealand</b>                                         | RCM Mark, Australia/NZ Emissions Compliant                                                                                                                                                                                |
| <b>Shipping Weight</b>                                                                         | <b>-AGA Models</b>                                                       | 3.5 lb (1.6 kg)                                                                                                                                                                                                           |
|                                                                                                | <b>-AGC Models</b>                                                       | 3.9 lb (1.8 kg)                                                                                                                                                                                                           |

## VA9208-Bxx-x Series On/Off Electric Spring Return Actuator (Part 1 of 2 )

|                                               |                                                                          |                                                                                                                                                                                                                                                                                                                        |
|-----------------------------------------------|--------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Power Requirements</b>                     | <b>-BGx Models</b>                                                       | AC 24 V (AC 18 V to 30 V) at 50/60 Hz: Class 2 (North America) or Safety Extra-Low Voltage (SELV) (Europe), 6.1 VA Running, 1.2 VA Holding Position<br>DC 24 V (DC 21.6 V to 28.8 V): Class 2 (North America) or SELV (Europe)<br>3.5 W Running, 0.5 W Holding Position<br>Minimum Transformer Size: 7 VA per Actuator |
|                                               | <b>-BAx Models</b>                                                       | AC 120 V (AC 102 V to 132 V) at 60 Hz: 0.05 A Running, 0.03 A Holding Position                                                                                                                                                                                                                                         |
|                                               | <b>-BDx Models</b>                                                       | AC 230 V (AC 198 V to 264 V) at 50/60 Hz: 0.04 A Running, 0.03 A Holding Position                                                                                                                                                                                                                                      |
| <b>Auxiliary Switch Rating</b>                | <b>-xxC Models</b>                                                       | Two Single-Pole, Double-Throw (SPDT), Double-Insulated Switches with Gold over Silver Contacts:<br>AC 24 V, 50 VA Pilot Duty<br>AC 120 V, 5.8 A Resistive, 1/4 hp, 275 VA Pilot Duty<br>AC 240 V, 5.0 A Resistive, 1/4 hp, 275 VA Pilot Duty                                                                           |
| <b>Spring Return</b>                          |                                                                          | Direction is Selectable with Mounting Position of Actuator:<br>Actuator Face Labeled A is Away from Valve: CCW Spring Return<br>Actuator Face Labeled B is Away from Valve: CW Spring Return                                                                                                                           |
| <b>Rated Torque</b>                           | <b>Power On (Running)</b>                                                | 70 lb·in. (8 N·m) All Operating Temperatures                                                                                                                                                                                                                                                                           |
|                                               | <b>Power Off (Spring Returning)</b>                                      | 70 lb·in. (8 N·m) at Standard Operating Temperatures<br>53 lb·in. (6 N·m) at Extended Operating Temperatures                                                                                                                                                                                                           |
| <b>Rotation Range</b>                         |                                                                          | Maximum Full Stroke: 95°                                                                                                                                                                                                                                                                                               |
| <b>Rotation Time for 90 Degrees of Travel</b> | <b>Power On (Running)</b>                                                | 55 to 71 Seconds for 0 to 70 lb·in. (8 N·m) Load, at all Operating Conditions<br>60 Seconds Nominal at Full Rated Load (0.25 rpm)                                                                                                                                                                                      |
|                                               | <b>Power Off (Spring Returning)</b>                                      | 13 to 26 Seconds for 0 to 70 lb·in. (8 N·m) Load, at Room Temperature<br>21 Seconds Nominal at Full Rated Load<br>39 Seconds Maximum with 70 lb·in. (8 N·m) Load, at -4°F (-20°C)<br>108 Seconds Maximum with 53 lb·in. (6 N·m) Load at -40°F (-40°C)                                                                  |
| <b>Life Cycles</b>                            |                                                                          | 60,000 Full Stroke Cycles with 70 lb·in. (8 N·m) Load                                                                                                                                                                                                                                                                  |
| <b>Audible Noise Rating</b>                   | <b>Power On (Running)</b>                                                | <47 dBA at 70 lb·in. (8 N·m) Load, at a Distance of 39-13/32 in. (1 m)                                                                                                                                                                                                                                                 |
|                                               | <b>Power On (Holding)</b>                                                | <20 dBA at a Distance of 39-13/32 in. (1 m)                                                                                                                                                                                                                                                                            |
|                                               | <b>Power Off (Spring Returning)</b>                                      | <52 dBA at 70 lb·in. (8 N·m) Load, at a Distance of 39-13/32 in. (1 m)                                                                                                                                                                                                                                                 |
| <b>Electrical Connections</b>                 | <b>Bxx-3 Models</b>                                                      | 48 in. (1.2 m) UL 758 Type AWM Halogen Free Cable with 18 AWG (0.85 mm <sup>2</sup> ) Conductors and 1/4 in. (6 mm) Ferrule Ends                                                                                                                                                                                       |
|                                               | <b>Auxiliary Switches (-xxC Models)</b>                                  | 48 in. (1.2 m) UL 758 Type AWM Halogen Free Cable with 18 AWG (0.85 mm <sup>2</sup> ) Conductors and 1/4 in. (6 mm) Ferrule Ends                                                                                                                                                                                       |
| <b>Conduit Connections</b>                    |                                                                          | Integral Connectors for 3/8 in. (10 mm) Flexible Metal Conduit                                                                                                                                                                                                                                                         |
| <b>Fluid Temperature Limits</b>               | <b>VG12x1 and VG18x1 Series</b>                                          | 23 to 203°F (-5 to 95°C), Not Rated for Steam Service                                                                                                                                                                                                                                                                  |
|                                               | <b>VG12x5 and VG18x5 Series</b>                                          | -22 to 212°F (-30 to 100°C), Not Rated for Steam Service                                                                                                                                                                                                                                                               |
|                                               | <b>VG12x5 and VG18x5 Series with M9000-561 Thermal Barrier Installed</b> | -22 to 284°F (-30 to 140°C) water; 15 psig (103 kPa) at 250°F (121°C) Saturated Steam                                                                                                                                                                                                                                  |

## VA9208-Bxx-x Series On/Off Electric Spring Return Actuator (Part 2 of 2 )

|                                                                                                            |                                  |                                                                                                                                                                                                                           |
|------------------------------------------------------------------------------------------------------------|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Ambient Conditions</b>                                                                                  | <b>Standard Operating</b>        | -4 to 140°F (-20 to 60°C); 90% RH Maximum, Noncondensing                                                                                                                                                                  |
|                                                                                                            | <b>Extended Operating</b>        | -40 to 4°F (-40 to -20°C); 90% RH Maximum, Noncondensing                                                                                                                                                                  |
|                                                                                                            | <b>Storage</b>                   | -40 to 185°F (-40 to 85°C); 95% RH Maximum, Noncondensing                                                                                                                                                                 |
| <b>Enclosure Rating</b>                                                                                    |                                  | NEMA 2 (IP54) for all Mounting Directions                                                                                                                                                                                 |
| <b>Compliance</b><br><br> | <b>United States</b>             | UL Listed, CCN XAPX, File E27734; to UL 60730-1A: 2003-08, Ed. 3.1, Automatic Electrical Controls for Household and Similar Use; and UL 60730-2-14: 2002-02, Ed. 1, Part 2 Particular Requirements for Electric Actuators |
|                                                                                                            | <b>Canada</b>                    | UL Listed, CCN XAPX7, File E27734; to UL 60730-1:02-CAN/CSA: July 2002, 3rd Ed., Automatic Electrical Controls for Household and Similar Use; and CSA C22.2 No. 24-93 Temperature Indicating and Regulating Equipment     |
|                                                                                                            | <b>Europe</b>                    | CE Mark – Johnson Controls, Inc., declares that this product is in compliance with the essential requirements and other relevant provisions of the EMC Directive and the Low Voltage Directive.                           |
|                                                                                                            | <b>Australia and New Zealand</b> | RCM Mark, Australia/NZ Emissions Compliant                                                                                                                                                                                |
| <b>Shipping Weight</b>                                                                                     | <b>-BGC Models</b>               | 3.8 lb (1.7 kg)                                                                                                                                                                                                           |
|                                                                                                            | <b>-BAC and -BDC Models</b>      | 4.2 lb (1.9 kg)                                                                                                                                                                                                           |
|                                                                                                            | <b>-BGA Models</b>               | 3.4 lb (1.5 kg)                                                                                                                                                                                                           |
|                                                                                                            | <b>-BAA and -BDA Models</b>      | 3.8 lb (1.7 kg)                                                                                                                                                                                                           |

The performance specifications are nominal and conform to acceptable industry standards. For application at conditions beyond these specifications, consult the local Johnson Controls office. Johnson Controls, Inc. shall not be liable for damages resulting from misapplication or misuse of its products.

### European Single Point of Contact:

JOHNSON CONTROLS  
WESTENDHOF 3  
45143 ESSEN  
GERMANY

### NA/SA Single Point of Contact:

JOHNSON CONTROLS  
507 E MICHIGAN ST  
MILWAUKEE WI 53202  
USA

### APAC Single Point of Contact:

JOHNSON CONTROLS  
C/O CONTROLS PRODUCT  
MANAGEMENT  
NO. 22 BLOCK D NEW DISTRICT  
WUXI JIANGSU PROVINCE 214142  
CHINA



**Building Technologies & Solutions**  
507 E. Michigan Street, Milwaukee, WI 53202

Metasys® and Johnson Controls® are registered trademarks of Johnson Controls, Inc.  
All other marks herein are the marks of their respective owners. © 2017 Johnson Controls, Inc.